
**KWVE30-B-N** [↗](#)

Recirculating ball bearing carriage

Carriages KWVE...-B-N, low carriage, four-row

Teknik bilgiler

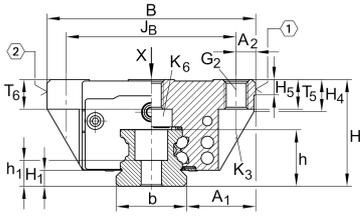


Mevcut ürün modeliniz

Size code	30	
Version	B	
Carriage design	N	Low carriage





Main Dimensions & Performance Data

H	38 mm	Height system
B	90 mm	Width carriage
L	99 mm	Overall length carriage
C	27.500 N	Dynamic load rating
C ₀	55.000 N	Static load rating
M _{0x}	970 Nm	Static moment rating about X axis
M _{0y}	700 Nm	Static moment rating about Y axis
M _{0z}	700 Nm	Static moment rating about Z axis
≈m	1 kg	Ağırlık

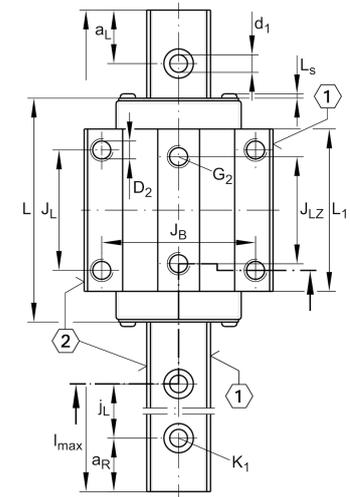



Mounting dimensions

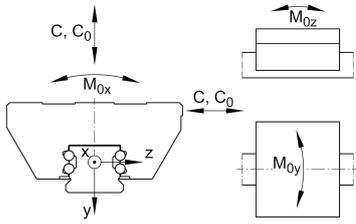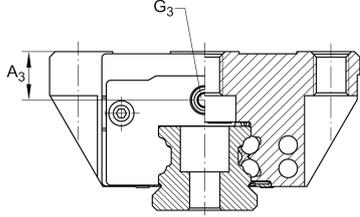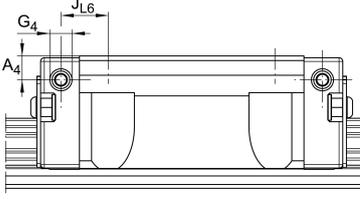

A ₁	31 mm	Distance from locating edge on carriage to locating edge on guideway
J _B	72 mm	
b	28 mm	Width rail
A ₂	9 mm	Distance from locating edge to hole
L ₁	72 mm	
L _S	1,65 mm	
J _L	52 mm	
J _{LZ}	44 mm	
H ₁	5,9 mm	Free space, system dimension
H ₄	9,8 mm	
H ₅	6,25 mm	
T ₅	12 mm	Thread depth
T ₆	9 mm	
G ₂	M10	Fixing screws above (DIN ISO 4762-12.9)
G ₂ M _A	41 Nm	Maximum tightening torque
K ₃	M8	Fixing screws below (DIN ISO 4762-12.9)
K ₃ M _A	41 Nm	Maximum tightening torque
K ₆	M8	Fixing screws below (DIN 7984-8.8)
K ₆ M _A	12 Nm	Maximum tightening torque
D ₂	8,6 mm	
A ₃	7,5 mm	Position lubrication connector
G ₃	M6	Lubrication connector
t G ₃	7 mm	Maximum permissible screw depth for lubrication connectors
A ₄	4,95 mm	Position lubrication connector
G ₄	M5	Lubrication connector
t G ₄	7 mm	Maximum permissible screw depth for lubrication connectors
J _{L6}	15,1 mm	Position lubrication connector



Ürün ayrıntılarını medias'ta görüntüleyin

26.02.2026, 11:52:37 TRT

SCHAEFFLER

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------