
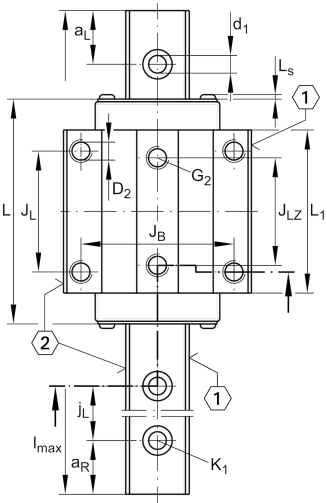


KWVE30-B-NL [↗](#)

Recirculating ball bearing carriage

Carriages KWVE...-B-NL, low, long carriage, four-row

Teknik bilgiler




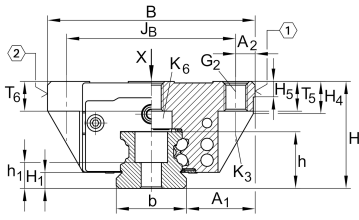


Mevcut ürün modeliniz

Size code	30	
Version	B	
Carriage design	NL	Low, long carriage

Main Dimensions & Performance Data

H	38 mm	Height system
B	90 mm	Width carriage
L	127 mm	Overall length carriage
C	34.500 N	Dynamic load rating
C ₀	74.000 N	Static load rating
M _{0x}	1.310 Nm	Static moment rating about X axis
M _{0y}	1.240 Nm	Static moment rating about Y axis
M _{0z}	1.240 Nm	Static moment rating about Z axis
≈m	1,5 kg	Ağırlık

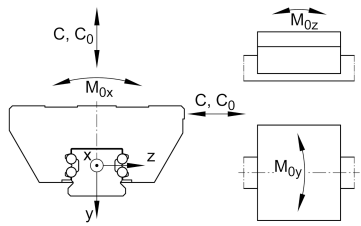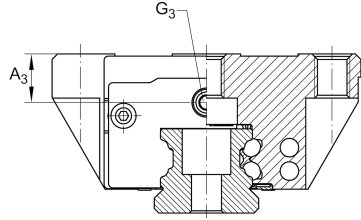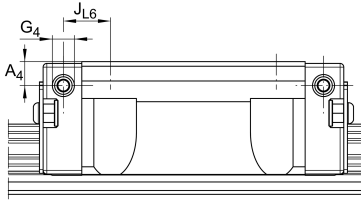

Mounting dimensions

A 1	31 mm	Distance from locating edge on carriage to locating edge on guideway
J B	72 mm	
b	28 mm	Width rail
A 2	9 mm	Distance from locating edge to hole
L 1	100 mm	
L S	1,65 mm	
J L	52 mm	
J LZ	44 mm	
H 1	5,9 mm	Free space, system dimension
H 4	9,8 mm	
H 5	6,25 mm	
T 5	12 mm	Thread depth
T 6	9 mm	
G 2	M10	Fixing screws above (DIN ISO 4762-12.9)
G2 M A	41 Nm	Maximum tightening torque
K 3	M8	Fixing screws below (DIN ISO 4762-12.9)
K3 M A	41 Nm	Maximum tightening torque
K 6	M8	Fixing screws below (DIN 7984-8.8)
K6 M A	12 Nm	Maximum tightening torque
D 2	8,6 mm	
A 3	7,5 mm	Position lubrication connector
G 3	M6	Lubrication connector
t G 3	7 mm	Maximum permissible screw depth for lubrication connectors
A 4	4,95 mm	Position lubrication connector
G 4	M5	Lubrication connector
t G 4	7 mm	Maximum permissible screw depth for lubrication connectors
J L6	29,1 mm	Position lubrication connector



Ürün ayrıntılarını medias'ta görüntüleyin

26.02.2026, 11:48:03 TRT

SCHAEFFLER

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------