
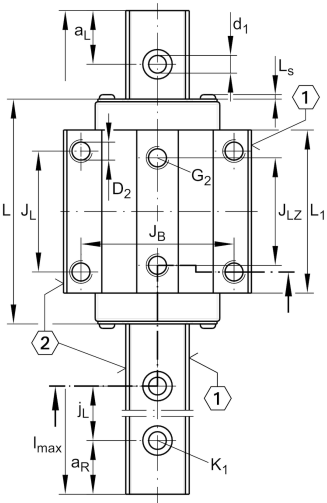


KWVE35-B-L

Recirculating ball bearing carriage

Carriages KWVE...-B-L, long carriage, four-row, full complement ball set

Teknik bilgiler




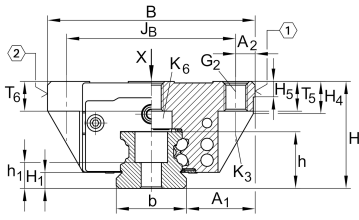


Mevcut ürün modeliniz

Size code	35
Version	B
Carriage design	L Long carriage

Main Dimensions & Performance Data

H	48 mm	Height system
B	100 mm	Width carriage
L	145 mm	Overall length carriage
C	47.500 N	Dynamic load rating
C ₀	100.000 N	Static load rating
M _{0x}	2.625 Nm	Static moment rating about X axis
M _{0y}	1.890 Nm	Static moment rating about Y axis
M _{0z}	1.890 Nm	Static moment rating about Z axis
≈m	2,52 kg	Ağırlık

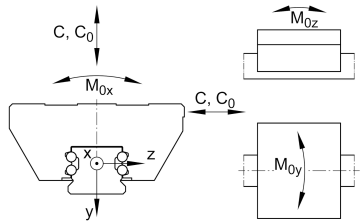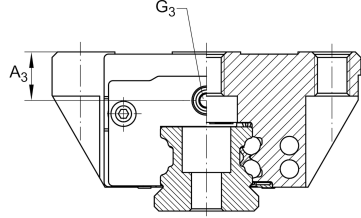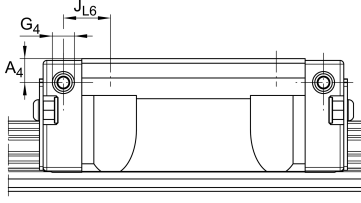

Mounting dimensions

A 1	33 mm	Distance from locating edge on carriage to locating edge on guideway
J B	82 mm	
b	34 mm	Width rail
A 2	9 mm	Distance from locating edge to hole
L 1	113 mm	
L S	1,65 mm	
J L	62 mm	
J LZ	52 mm	
H 1	6,7 mm	Free space, system dimension
H 4	14,3 mm	
H 5	6,75 mm	
T 5	13 mm	Thread depth
T 6	12,3 mm	
G 2	M10	Fixing screws above (DIN ISO 4762-12.9)
G2 M A	41 Nm	Maximum tightening torque
K 3	M8	Fixing screws below (DIN ISO 4762-12.9)
K3 M A	41 Nm	Maximum tightening torque
K 6	M8	Fixing screws below (DIN ISO 4762-12.9)
K6 M A	41 Nm	Maximum tightening torque
D 2	8,6 mm	
A 3	12,3 mm	Position lubrication connector
G 3	M6	Lubrication connector
t G 3	7 mm	Maximum permissible screw depth for lubrication connectors
A 4	11 mm	Position lubrication connector
G 4	M6	Lubrication connector
t G 4	7 mm	Maximum permissible screw depth for lubrication connectors
J L6	32,5 mm	Position lubrication connector



Ürün ayrıntılarını medias'ta görüntüleyin

24.02.2026, 03:20:15 TRT

SCHAEFFLER

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------