

**KWVE45-B-ESC**

Recirculating ball bearing carriage

Carriages KWVE...-B-ESC, narrow, short carriage, four-row, full complement ball set

Teknik bilgiler



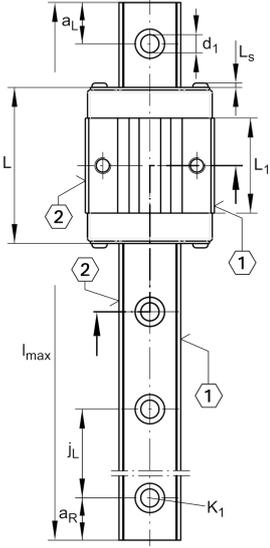



Mevcut ürün modeliniz

| | | |
|-----------------|-----|---|
| Size code | 45 | |
| Version | B | |
| Carriage design | ESC | Expanded design, short, narrow carriage |

Main Dimensions & Performance Data

| | | |
|-----------------|----------|-----------------------------------|
| H | 60 mm | Height system |
| B | 86 mm | Width carriage |
| L | 97,8 mm | Overall length carriage |
| C | 46.500 N | Dynamic load rating |
| C ₀ | 80.000 N | Static load rating |
| M _{0x} | 2.060 Nm | Static moment rating about X axis |
| M _{0y} | 883 Nm | Static moment rating about Y axis |
| M _{0z} | 883 Nm | Static moment rating about Z axis |
| ≈m | 1,8 kg | Ağırlık |

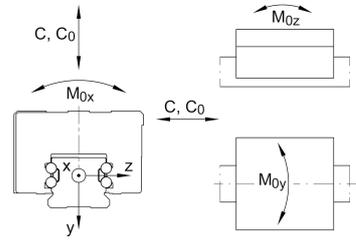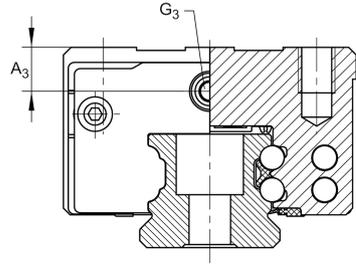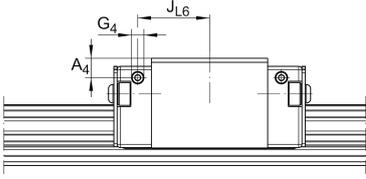

Mounting dimensions

| | | |
|--------|---------|--|
| A 1 | 20,5 mm | Distance from locating edge on carriage to locating edge on guideway |
| J B | 60 mm | |
| b | 45 mm | Width rail |
| A 2 | 13 mm | Distance from locating edge to hole |
| L 1 | 59,7 mm | |
| L S | 2,2 mm | |
| H 1 | 9,7 mm | Free space, system dimension |
| H 5 | 9,25 mm | |
| T 5 | 17 mm | Thread depth |
| G 2 | M10 | Fixing screws above (DIN ISO 4762-12.9) |
| G2 M A | 83 Nm | Maximum tightening torque |
| A 3 | 16,5 mm | Position lubrication connector |
| G 3 | M6 | Lubrication connector |
| t G 3 | 7 mm | Maximum permissible screw depth for lubrication connectors |
| A 4 | 16,5 mm | Position lubrication connector |
| G 4 | M6 | Lubrication connector |
| t G 4 | 7 mm | Maximum permissible screw depth for lubrication connectors |
| J L6 | 37,9 mm | Position lubrication connector |

Additional information

| | | |
|----------|------|---------------|
| VMKB_065 | KWVE | Material name |
|----------|------|---------------|