
**KWVE45-B-SNL**

Recirculating ball bearing carriage

Carriages KWVE...-B-SNL, narrow, low, long carriage, four-row

## Teknik bilgiler

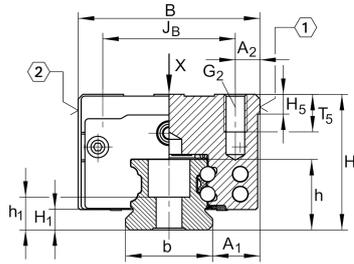






## Mevcut ürün modeliniz

Size code	45	
Version	B	
Carriage design	SNL	Narrow, low, long carriage

## Main Dimensions &amp; Performance Data

H	52 mm	Height system
B	86 mm	Width carriage
L	172,7 mm	Overall length carriage
C	82.000 N	Dynamic load rating
C <sub>0</sub>	181.000 N	Static load rating
M <sub>0x</sub>	4.635 Nm	Static moment rating about X axis
M <sub>0y</sub>	4.000 Nm	Static moment rating about Y axis
M <sub>0z</sub>	4.000 Nm	Static moment rating about Z axis
≈m	2,68 kg	Ağırlık

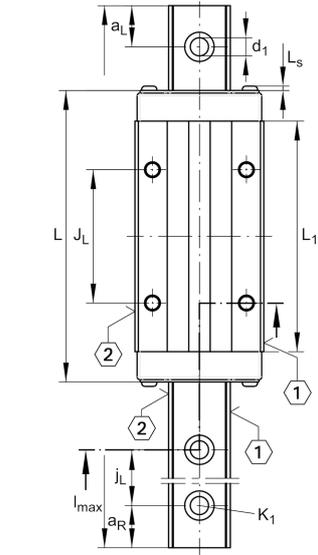

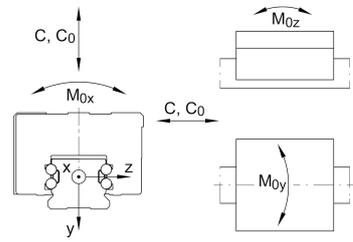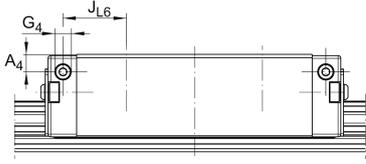

## Mounting dimensions

A <sub>1</sub>	20,5 mm	Distance from locating edge on carriage to locating edge on guideway
J <sub>B</sub>	60 mm	
b	45 mm	Width rail
A <sub>2</sub>	13 mm	Distance from locating edge to hole
L <sub>1</sub>	134,6 mm	
L <sub>S</sub>	2,2 mm	
J <sub>L</sub>	80 mm	
H <sub>1</sub>	9,7 mm	Free space, system dimension
H <sub>5</sub>	9,25 mm	
T <sub>5</sub>	16,5 mm	Thread depth
G <sub>2</sub>	M10	Fixing screws above (DIN ISO 4762-12.9)
G <sub>2</sub> M <sub>A</sub>	83 Nm	Maximum tightening torque
A <sub>3</sub>	8,5 mm	Position lubrication connector
G <sub>3</sub>	M6	Lubrication connector
t G <sub>3</sub>	7 mm	Maximum permissible screw depth for lubrication connectors
A <sub>4</sub>	8,5 mm	Position lubrication connector
G <sub>4</sub>	M6	Lubrication connector
t G <sub>4</sub>	7 mm	Maximum permissible screw depth for lubrication connectors
J <sub>L6</sub>	35,3 mm	Position lubrication connector

## Additional information

VMKB_065	KWVE	Material name
----------	------	---------------