**KWVE25-B-ES**

## Recirculating ball bearing carriage

Carriages KWVE...-B-ES, carriage for four-row linear ball bearing and guideway assembly, expanded type, narrow design


## Teknik bilgiler





## Mevcut ürün modeliniz

Size code	25	
Version	B	
Carriage design	ES	Expanded design, narrow carriage

## Main Dimensions &amp; Performance Data

H	33 mm	Height system
B	48 mm	Width carriage
L	83,3 mm	Overall length carriage
C	17.900 N	Dynamic load rating
C <sub>0</sub>	37.000 N	Static load rating
M <sub>0x</sub>	510 Nm	Static moment rating about X axis
M <sub>0y</sub>	395 Nm	Static moment rating about Y axis
M <sub>0z</sub>	395 Nm	Static moment rating about Z axis
≈m	0,56 kg	Ağırlık

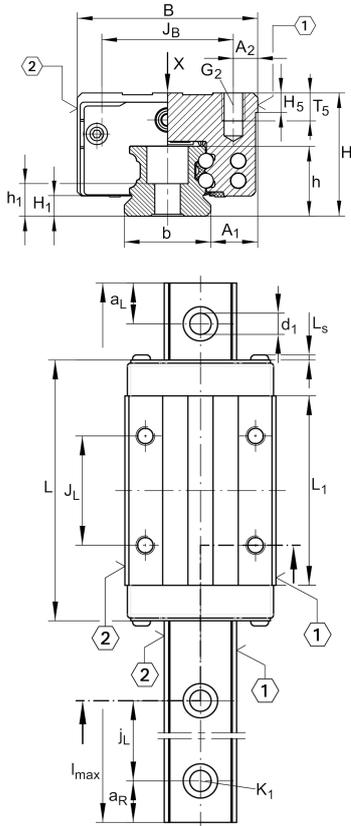

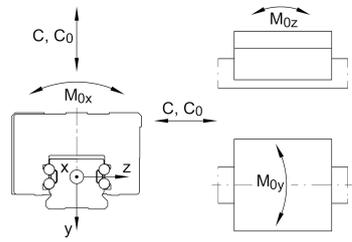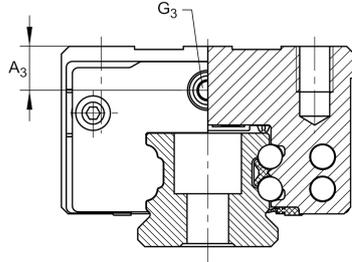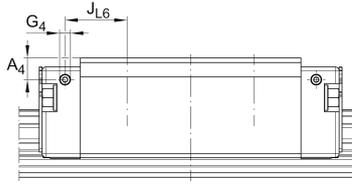

### Mounting dimensions

A <sub>1</sub>	12,5 mm	Distance from locating edge on carriage to locating edge on guideway
J <sub>B</sub>	35 mm	
b	23 mm	Width rail
A <sub>2</sub>	6,5 mm	Distance from locating edge to hole
L <sub>1</sub>	60,7 mm	
L <sub>S</sub>	1,65 mm	
J <sub>L</sub>	35 mm	
H <sub>1</sub>	5,2 mm	Free space, system dimension
H <sub>5</sub>	5,25 mm	
T <sub>5</sub>	10 mm	Thread depth
G <sub>2</sub>	M6	Fixing screws above (DIN ISO 4762-12.9)
G <sub>2 M<sub>A</sub></sub>	17 Nm	Maximum tightening torque
D <sub>2</sub>	6,8 mm	
A <sub>3</sub>	11 mm	Position lubrication connector
G <sub>3</sub>	M6	Lubrication connector
t <sub>G<sub>3</sub></sub>	7 mm	Maximum permissible screw depth for lubrication connectors
A <sub>4</sub>	6,5 mm	Position lubrication connector
G <sub>4</sub>	M3	Lubrication connector
t <sub>G<sub>4</sub></sub>	7 mm	Maximum permissible screw depth for lubrication connectors
J <sub>L6</sub>	12,85 mm	Position lubrication connector

### Additional information

VMKB_065	KWVE	Material name
----------	------	---------------