

**KWVE25-B-ESC**

## Recirculating ball bearing carriage

Carriages KWVE...-B-ESC, narrow, short carriage, four-row, full complement ball set

## Teknik bilgiler



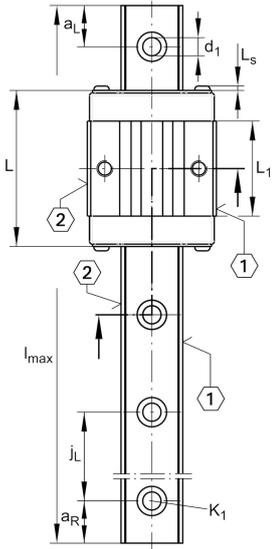
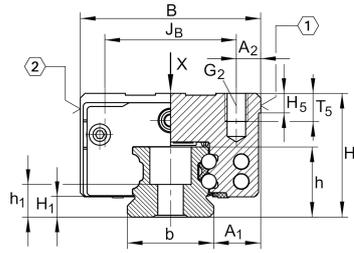


## Mevcut ürün modeliniz

Size code	25	
Version	B	
Carriage design	ESC	Expanded design, short, narrow carriage

## Main Dimensions &amp; Performance Data

H	33 mm	Height system
B	48 mm	Width carriage
L	58,2 mm	Overall length carriage
C	12.500 N	Dynamic load rating
C <sub>0</sub>	22.200 N	Static load rating
M <sub>0x</sub>	305 Nm	Static moment rating about X axis
M <sub>0y</sub>	155 Nm	Static moment rating about Y axis
M <sub>0z</sub>	155 Nm	Static moment rating about Z axis
≈m	0,3 kg	Ağırlık

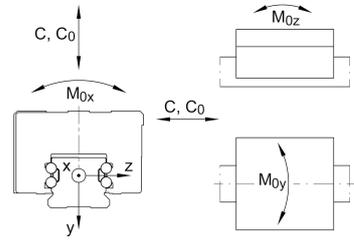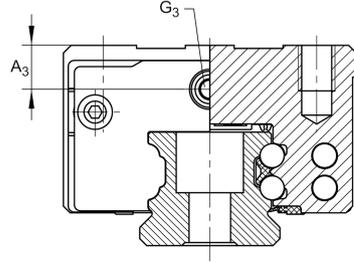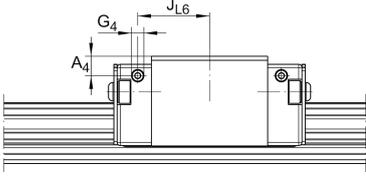

## Mounting dimensions

A 1	12,5 mm	Distance from locating edge on carriage to locating edge on guideway
J B	35 mm	
b	23 mm	Width rail
A 2	6,5 mm	Distance from locating edge to hole
L 1	35,6 mm	
L S	1,65 mm	
H 1	5,1 mm	Free space, system dimension
H 5	5,25 mm	
T 5	10 mm	Thread depth
G 2	M6	Fixing screws above (DIN ISO 4762-12.9)
G2 M A	17 Nm	Maximum tightening torque
A 3	8 mm	Position lubrication connector
G 3	M6	Lubrication connector
t G 3	7 mm	Maximum permissible screw depth for lubrication connectors
A 4	6 mm	Position lubrication connector
G 4	M3	Lubrication connector
t G 4	6 mm	Maximum permissible screw depth for lubrication connectors
J L 6	22 mm	Position lubrication connector

## Additional information

VMKB_065	KWVE	Material name
----------	------	---------------