
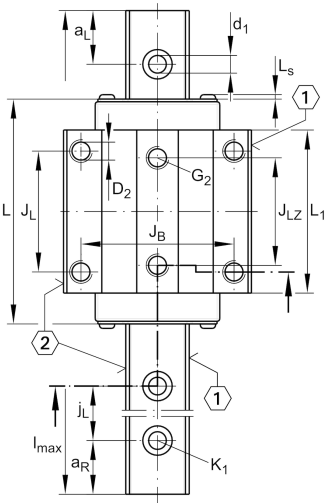


KWVE25-B-NL

Recirculating ball bearing carriage

Carriages KWVE...-B-NL, low, long carriage, four-row

Teknik bilgiler




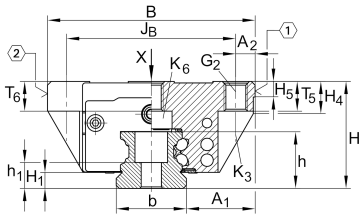


Mevcut ürün modeliniz

Size code	25	
Version	B	
Carriage design	NL	Low, long carriage

Main Dimensions & Performance Data

H	31 mm	Height system
B	70 mm	Width carriage
L	109,1 mm	Overall length carriage
C	23.400 N	Dynamic load rating
C ₀	54.000 N	Static load rating
M _{0x}	745 Nm	Static moment rating about X axis
M _{0y}	825 Nm	Static moment rating about Y axis
M _{0z}	825 Nm	Static moment rating about Z axis
≈m	0,82 kg	Ağırlık

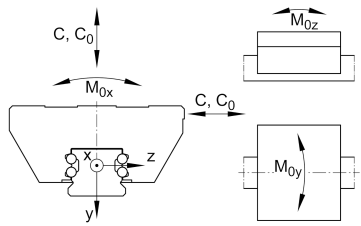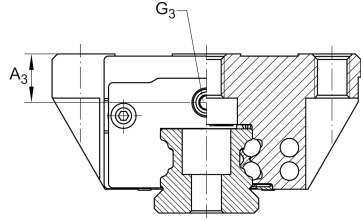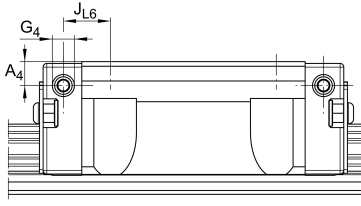

Mounting dimensions

A 1	23,5 mm	Distance from locating edge on carriage to locating edge on guideway
J B	57 mm	
b	23 mm	Width rail
A 2	6,5 mm	Distance from locating edge to hole
L 1	86,5 mm	
L S	1,65 mm	
J L	45 mm	
J LZ	40 mm	
H 1	5,1 mm	Free space, system dimension
H 4	9,3 mm	
H 5	5,25 mm	
T 5	10 mm	Thread depth
T 6	8 mm	
G 2	M8	Fixing screws above (DIN ISO 4762-12.9)
G2 M A	24 Nm	Maximum tightening torque
K 3	M6	Fixing screws below (DIN ISO 4762-12.9)
K3 M A	17 Nm	Maximum tightening torque
K 6	M6	Fixing screws below (DIN 7984-8.8)
K6 M A	8 Nm	Maximum tightening torque
D 2	6,7 mm	
A 3	6 mm	Position lubrication connector
G 3	M6	Lubrication connector
t G 3	7 mm	Maximum permissible screw depth for lubrication connectors
A 4	4 mm	Position lubrication connector
G 4	M3	Lubrication connector
t G 4	6 mm	Maximum permissible screw depth for lubrication connectors
J L6	24,95 mm	Position lubrication connector



Ürün ayrıntılarını medias'ta görüntüleyin

26.02.2026, 12:49:17 TRT

SCHAEFFLER

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------