
**KWVE25-W**

## Recirculating ball bearing carriage

Carriages KWVE..-W, wide carriage for linear recirculating ball bearing and guideway assembly

## Teknik bilgiler

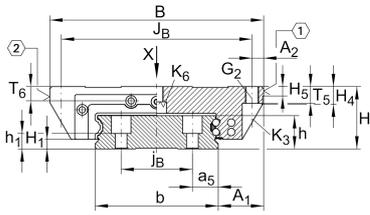





## Mevcut ürün modeliniz

Size code	25	
Version	Version	
Carriage design	W	Wide carriage and wide guideway

## Main Dimensions &amp; Performance Data

H	35 mm	Height system
B	120 mm	Width carriage
L	81,7 mm	Overall length carriage
C	17.900 N	Dynamic load rating
C <sub>0</sub>	37.000 N	Static load rating
M <sub>0x</sub>	1.470 Nm	Static moment rating about X axis
M <sub>0y</sub>	395 Nm	Static moment rating about Y axis
M <sub>0z</sub>	395 Nm	Static moment rating about Z axis
m	1,1 kg	Ağırlık

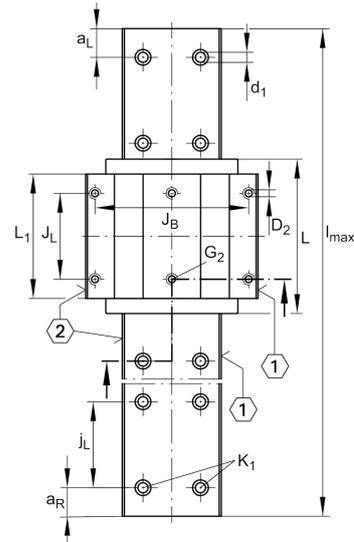

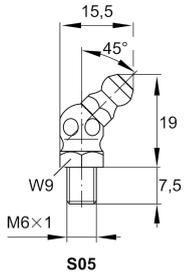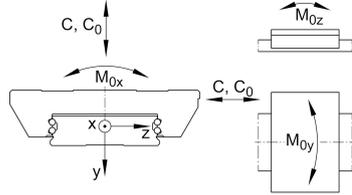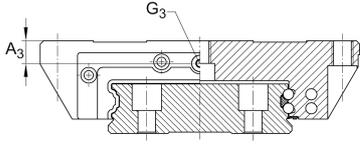

## Mounting dimensions

A <sub>1</sub>	25,5 mm	Distance from locating edge on carriage to locating edge on guideway
J <sub>B</sub>	107 mm	
b	69 mm	Width rail
A <sub>2</sub>	6,5 mm	Distance from locating edge to hole
L <sub>1</sub>	60,7 mm	
J <sub>L</sub>	45 mm	
H <sub>1</sub>	5,2 mm	Free space, system dimension
H <sub>4</sub>	9,9 mm	
H <sub>5</sub>	5 mm	
T <sub>5</sub>	10 mm	Thread depth
T <sub>6</sub>	8,5 mm	
G <sub>2</sub>	M8	Fixing screws above (DIN ISO 4762-12.9)
G <sub>2</sub> M <sub>A</sub>	41 Nm	Maximum tightening torque
K <sub>3</sub>	M6	Fixing screws below (DIN ISO 4762-12.9)
K <sub>3</sub> M <sub>A</sub>	17 Nm	Maximum tightening torque
K <sub>6</sub>	M6	Fixing screws below (DIN 7984-8.8)
K <sub>6</sub> M <sub>A</sub>	8 Nm	Maximum tightening torque
D <sub>2</sub>	6,7 mm	
A <sub>3</sub>	10 mm	Position lubrication connector
G <sub>3</sub>	M6	Lubrication connector
t <sub>G<sub>3</sub></sub>	6 mm	Maximum permissible screw depth for lubrication connectors

## Additional information

VMKB_065	KWVE	Material name
----------	------	---------------